



Accessory Structure Greater than 200 Square Feet

Directions

1. Fill in the blanks on pages 2 and 3 with dimensions and materials which will be used to build the structure. Please print legibly.
2. Indicate in the check boxes on page 3 which details from page 4 will be used.

Note: Heated garages will require insulation, such as ceilings, walls, and foundation.

Address: _____

Floor Plan

Note: For roofs with slopes less than 4:12, follow manufacturer's instructions for low slope application of roofing material.

☐ Truss or 2x _____ rafters spaced _____" O.C.
(example: Put checkmark in box -or- 2 x 10 Rafters Spaced 24" O.C.)

Minimum 1x _____ ridge board
(example: 1 x 12)

Sheathing _____
(example: 1/2" exterior plywood)

Roof covering _____
(example: Class A 3 tab shingles)

Underlayment _____
(example: 1 layer 15# felt)

12 pitch | _____

Ceiling Insulation _____
(If heated - example: R-38)

2x _____ ceiling joists @ _____ O.C.
(example: 2 x 8 @ 24" O.C.)

Double 2x _____ top plate
(example: 2 x 6)

Span _____
(example: 23' 5")

Ceiling height _____
(example: 8')

Siding _____
(example: lap or T-111)

Wall sheathing _____
(example: 1/2" exterior plywood)

2x _____ studs @ _____ O.C.
(example: 2 x 6 @ 24" O.C.)

Cont. 2x _____ sill plate
(example: 2 x 6)

Wall Insulation _____
(If heated - example: R-20 Fiberglass Batts)

Foundation Insulation _____
(If heated - example: R-10)

Footing size _____ x _____
(example: 8" x 16")

Building Section

Provide roof tie downs
Solid 2x blocking between
rafters that are 2x12 or greater

Span

Note: Pre-engineered roof trusses
w/truss clips may be used in lieu of
roof structure shown.

Note: Truss Calculations must be submitted
with permit application.

A


B

Concrete Encased Ground
required for new service

✓ Check one
☐ Foundation Detail A
☐ Foundation Detail B

See page 3

Foundation Detail A

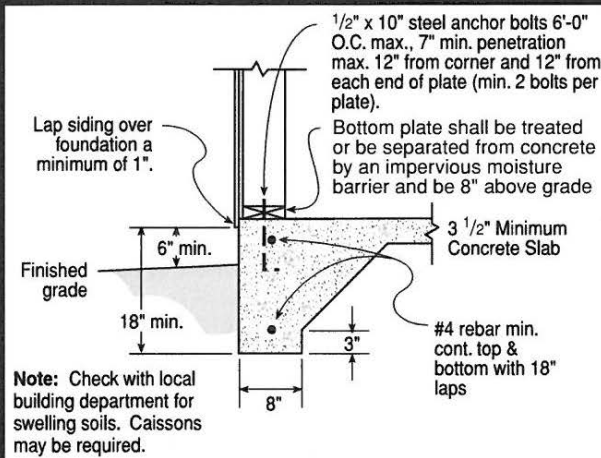

Foundation Detail B

